



SETTING THE NEW STANDARD

2024 PRODUCT CATALOG







TABLE OF CONTENTS


EGO Commercial PGX™ Charging	4
EGO Commercial Mowers	14
EGO Commercial Backpack Blower	16
EGO Commercial String Trimmer	18
EGO Commercial Bike Handle Brush Cutter	20
EGO Commercial Telescopic Pole Saw	22
EGO Commercial Edger	24
EGO Commercial Pole Hedge Trimmer	26
EGO Commercial Chain Saw	30
EGO Commercial Battery Technology	32
EGO Commercial Accessories	34
Notes	36

MAXIMIZE YOUR UPTIME



CHARGE ONBOARD

WORK ALL DAY & CHARGE OVERNIGHT

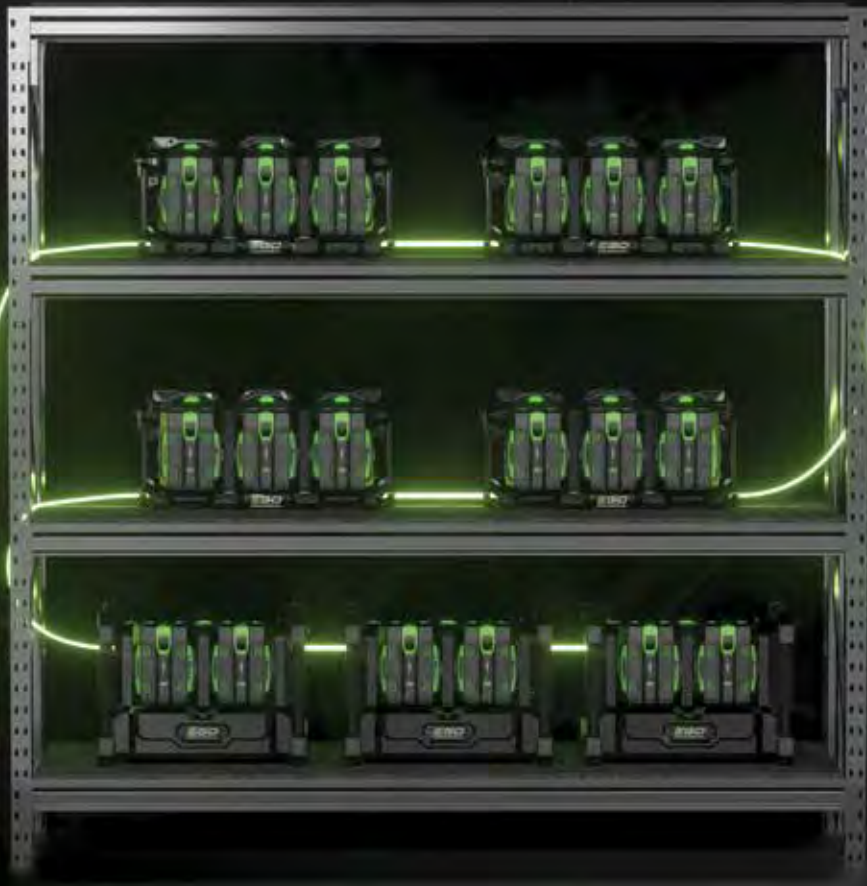

CHARGE OVERNIGHT



CHARGE OFF GRID

INTRODUCING PGX[™] COMMERCIAL CHARGING SYSTEM

EGO Commercial's PGX[™] Commercial Charging system is a flexible charging solution that scales to your business.



PGX[™] 1600W HUB

Mounts in a building, van, or trailer,
and runs off any standard 15A circuit



PGX[™] 3-PORT DOCK

Simultaneously charges up to three
EGO 56V ARC Lithium[™] batteries



PGX™ POWER BANK

Charges 30+ Ah of portable batteries during the day






IT STARTS WITH THE POWER HUB

- ONLY ONE POWER HUB NEEDED
- CONNECTS TO PGX[™] COMMERCIAL CHARGING 3-PORT DOCKS
- MOUNTS IN A BUILDING, VAN, OR TRAILER
- RUNS OFF OF A SINGLE 15A CIRCUIT

PGX1600H

PGX™ COMMERCIAL CHARGING 1600W HUB

STEEL REINFORCED THROUGH-HOLE SCREW MOUNTING

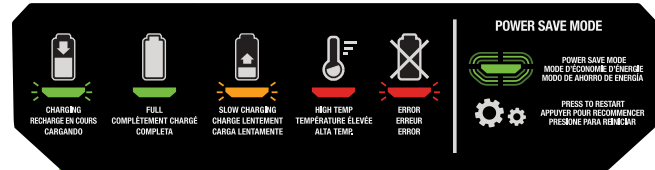

CHARGE STATUS INDICATOR

E-TRACK COMPATIBLE
(REQUIRES AEK1000 ACCESSORY KIT, SOLD SEPARATELY)

FAN COOLED DESIGN

RUGGED 5.5 FOOT POWER CABLE

ONLY REQUIRES STANDARD 15A CIRCUIT

RUGGED 8.5 FOOT
TWIST-LOCK
CONNECTION CABLE
CONNECTS HUB TO 3-PORT DOCKS



POWER REQUIREMENT	15A CIRCUIT
INPUT WATTAGE	1600W
OUTPUT CURRENT	22A
CONNECTIVITY	BLUETOOTH AND WIFI
DIMENSIONS	16" x 6.25" x 10"



CHARGE UP TO 70 BATTERIES OVERNIGHT

- 3-PORT DOCK CHARGES 3 BATTERIES SIMULTANEOUSLY
- CONNECT UP TO 24 DOCKS TO ONE PGX[™] HUB
- DOCKS CHARGE IN SERIES

PGX3000D

PGX™ COMMERCIAL CHARGING 3-PORT DOCK



CHARGE STATUS INDICATOR

INTEGRATED LOCKING BAR
(REQUIRES 7MM SHACKLE PADLOCK)

E-TRACK COMPATIBLE
(REQUIRES AEK1000 ACCESSORY KIT, SOLD SEPARATELY)

RUGGED 2 FOOT
CONNECTION CABLE



CHARGE 3 BATTERIES SIMULTANEOUSLY

STEEL REINFORCED THROUGH-HOLE SCREW MOUNTING



7x MOUNTING POINTS

POWER REQUIREMENT	PGX™ HUB (15A CIRCUIT)
EXPANDABLE	Yes
CONNECTIVITY	BLUETOOTH AND WIFI
DIMENSIONS	23.5" x 6.75" x 11.5"



CHARGE DURING THE DAY

- CHARGES 30+ Ah OF EGO POWER+ PORTABLE BATTERIES DURING THE DAY
- WORKS SEAMLESSLY WITH THE POWER HUB
- LARGE FORMAT BATTERIES CAN BE SWAPPED FOR MORE CAPACITY



PGX1400PB

PGX™ COMMERCIAL POWER BANK



Additional SKU Configurations:
PGX3100K Includes PGX1400PB, HC2240T, and two BA4200T.

AC RECHARGE REQUIREMENT	PGX™ HUB (15A CIRCUIT)
CHARGE TIME (AC)	120 MINUTES (40Ah HIGH CAPACITY)
CHARGE TIME (DC)	75 MINUTES with two 12.0Ah 60 MINUTES with two 10.0Ah 50 MINUTES with two 8.0Ah 45 MINUTES with two 7.5Ah 35 MINUTES with two 6.0Ah 30 MINUTES with two 5.0Ah 25 MINUTES with two 4.0Ah 30 MINUTES with two 2.5Ah
DC CHARGING SPEED	2x 700W
EXPANDABLE	YES
CONNECTIVITY	BLUETOOTH AND WIFI
WEIGHT	38 LBS
DIMENSIONS	20.25" x 16.5" x 16"
WEATHER RESISTANT RATING	IPX2

HC2240T

PGX™ COMMERCIAL 2.2kWh (40Ah) HIGH CAPACITY BATTERY



VOLTAGE	56V
ENERGY	2.2kWh
CHARGE TIME	120 MINUTES (40Ah HIGH CAPACITY)
AC RECHARGE REQUIREMENT	PGX™ HUB (15A CIRCUIT)
CONNECTIVITY	BLUETOOTH
WEIGHT	39 LBS
DIMENSIONS	13.3" x 6.8" x 12.7"
WEATHER RESISTANT RATING	IPX4



INDUSTRY'S MOST POWERFUL GAS OR CORDLESS WALK-BEHIND MOWER



LMX5300SP

COMMERCIAL 22" ALUMINUM DECK SELF-PROPELLED LAWN MOWER



GAS EQUIVALENT	230CC RATING
TORQUE	14.8 FT-LBS
MAX POWER	4000W
RATED POWER	1600W
RUN TIME with two 12.0Ah batteries	UP TO 135 MINUTES
RECHARGE TIME with two 12.0Ah batteries using PGX™ Power Bank	75 MINUTES
BATTERY WATTS	8960
SELF-PROPELLED	YES

CUTTING SYSTEM	COMMERCIAL SINGLE BLADE
CUTTING HEIGHTS	8
DECK SIZE	22 INCHES
MAX BLADE TIP SPEED	18,000 FPM
DECK MATERIAL	ALUMINUM
BATTERY TECHNOLOGY	56V ARC LITHIUM™
WEIGHT WITHOUT BATTERY	99.2 LBS
WEATHER RESISTANT RATING	IPX5



60% MORE POWER

LBPX8000

COMMERCIAL 800 CFM BACKPACK BLOWER WITH PEAK POWER™

PEAK POWER TECHNOLOGY

COMBINES THE
POWER OF
TWO OR MORE
EGO ARC LITHIUM™
BATTERIES



DIGITAL CONTROLS
WITH TURBO LOCK
TAILOR PERFORMANCE
TO THE WAY YOU WORK

PREMIUM STRAPS
& BACK PADS

FULLY ADJUSTABLE
HAND GRIP & TUBE

DUAL GRAB HANDLES

3 POINT SUPPORT BASE
FOR STABILITY

OPTIMIZED AIRFLOW EFFICIENCY
FOR EXTENDED RUN TIME

GAS EQUIVALENT	60CC RATING
CLEARING CAPACITY	800 CFM
AIR SPEED	190 MPH
PUSH FORCE	26N
MAX POWER	1900W
RATED POWER	1700W
RUN TIME with two 12.0Ah	LOW - UP TO 240 MINUTES HIGH - UP TO 65 MINUTES TURBO - UP TO 50 MINUTES
DECIBEL RATING measured at 50 feet per ANSI standards	65db(A)
BATTERY TECHNOLOGY	56V ARC LITHIUM™ WITH PEAK POWER™
HOUSING	UV-RESISTANT COMPOSITE
WEIGHT WITHOUT BATTERY	16.3 LBS
WEATHER RESISTANT RATING	IPX5

Additional SKU Configurations:

LBPX8004-2 Includes (2) 6.0Ah batteries and 280W Dual Port charger.

LBPX8006-2 Includes (2) 10.0Ah batteries and 280W Dual Port charger.



20% MORE POWER

STX4500

COMMERCIAL 17.5" STRING TRIMMER



HIGH-PERFORMANCE
BRUSHLESS MOTOR

VARIABLE SPEED, INSTANT-ON TRIGGER

3-SPEED DIGITAL SPEED CONTROL

SHOULDER STRAP HOOK
(SHOULDER STRAP AVAILABLE)




COMPATIBLE WITH ABB1203-1
17.5 INCH STRING TRIMMER HEAD
(SOLD SEPARATELY)

CARBON FIBER SHAFT
STRONG AND LIGHT

OVERMOLDED
QUICK ADJUST
HANDLE

RAPID RELOAD HEAD
BACK TO WORK IN SECONDS

GAS EQUIVALENT	35CC RATING
MAX POWER	1600W
RATED POWER	1200W
RUN TIME with 5.0Ah battery on low	UP TO 60 MINUTES
MAX CUTTING CAPACITY	17.5 INCHES
MAX LINE DIAMETER	0.120 INCHES
HEAD ROTATION	COUNTER-CLOCKWISE
SPEEDS no load RPM	3-SPEED DIGITAL CONTROL (3500 / 4500 / 5700 RPM)
SHAFT MATERIAL	CARBON FIBER
LINE LOAD	RAPID RELOAD
DRIVE SHAFT	SOLID STEEL
AUXILIARY HANDLE CONSTRUCTION	OVERMOLDED
BATTERY TECHNOLOGY	56V ARC LITHIUM™
HOUSING	UV-RESISTANT COMPOSITE
TOOL LENGTH	72 INCHES
WEIGHT WITHOUT BATTERY	9 LBS
WEATHER RESISTANT RATING	IPX5

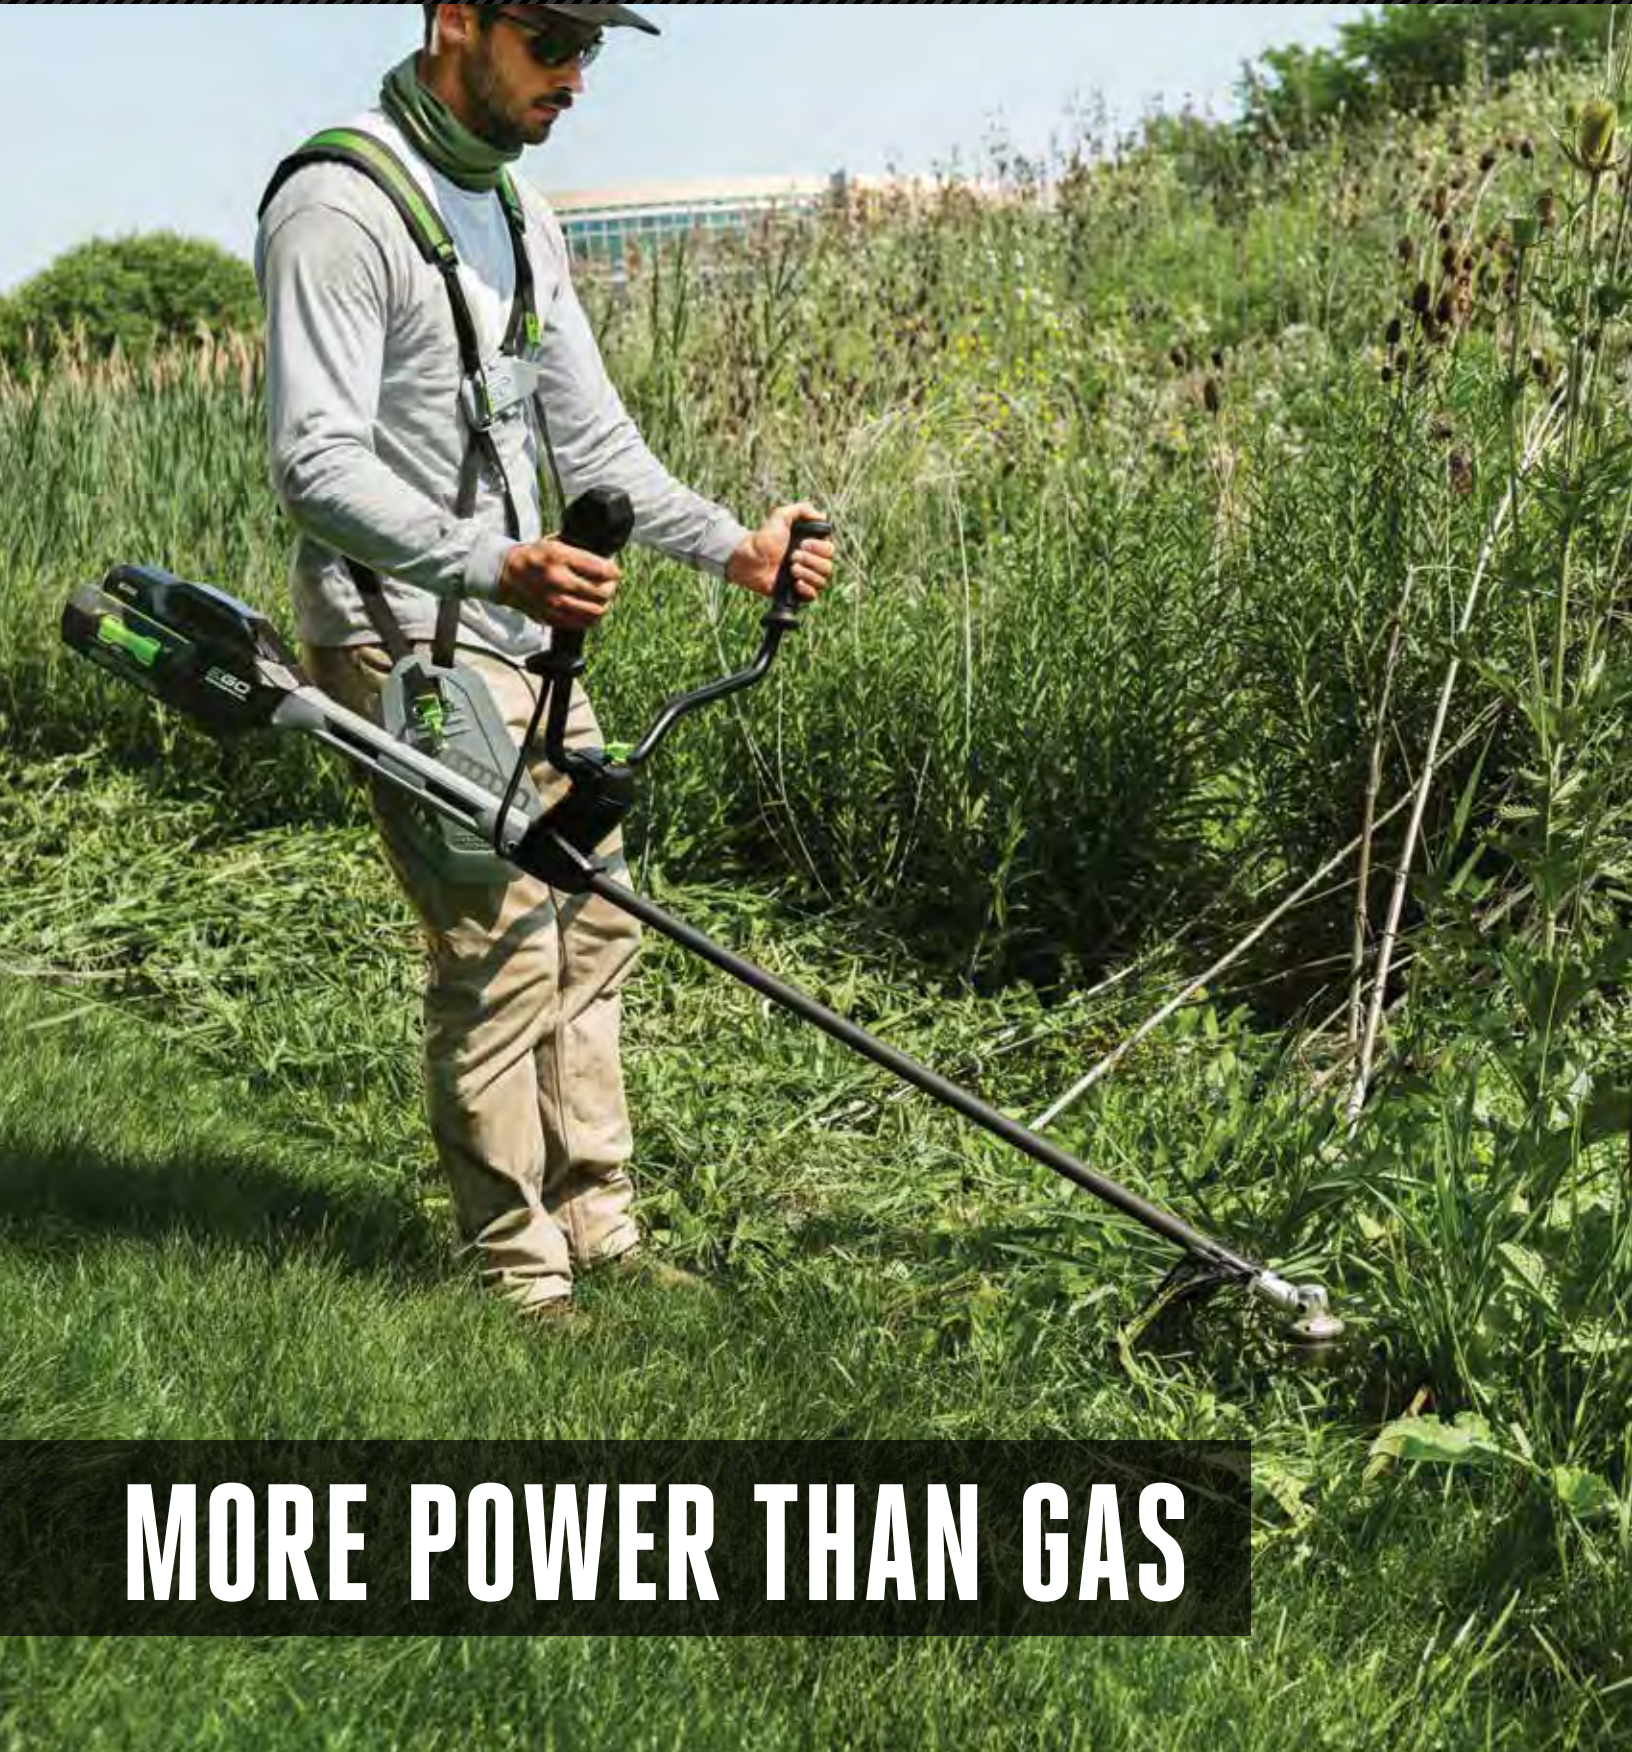

MORE POWER THAN GAS

BCX4500

COMMERCIAL 12" BIKE HANDLE BRUSH CUTTER



HIGH-PERFORMANCE
BRUSHLESS MOTOR

3-SPEED DIGITAL SPEED CONTROL

VARIABLE SPEED, INSTANT-ON TRIGGER

QUICK-ADJUST HANDLEBARS

CARBON FIBER SHAFT
STRONG AND LIGHT

SHOULDER HARNESS
INCLUDED

HIGH STRENGTH TRI BLADE
BLASTS THROUGH FINE FESCUE
TO 1 INCH SAPLINGS

COMPATIBLE WITH AH3810
17.5 INCH STRING TRIMMER HEAD
(SOLD SEPARATELY)

GAS EQUIVALENT	35CC RATING
MAX POWER	1600W
RATED POWER	1200W
RUN TIME with 7.5Ah battery on low	UP TO 60 MINUTES
MAX CUTTING CAPACITY	12 INCHES, 3-TOOTH BLADE
HEAD ROTATION	COUNTER-CLOCKWISE
SPEEDS no load RPM	3-SPEED DIGITAL CONTROL (3500 / 4500 / 5700 RPM)
SHAFT MATERIAL	CARBON FIBER
DRIVE SHAFT	SOLID STEEL
HANDLE BAR ADJUSTABILITY	QUICK ADJUST
BATTERY TECHNOLOGY	56V ARC LITHIUM™
HOUSING	UV-RESISTANT COMPOSITE
TOOL LENGTH	72 INCHES
WEIGHT WITHOUT BATTERY	11.2 LBS
WEATHER RESISTANT RATING	IPX5



40% LIGHTER

PSX2510

COMMERCIAL 10" TELESCOPIC POLE SAW




GAS EQUIVALENT	25CC RATING
RUN TIME with 2.5Ah battery	UP TO 110 CUTS
BAR LENGTH	10 INCHES
SHAFT MATERIAL	CARBON FIBER
CHAIN SPEED	VARIABLE SPEED UP TO 20 M/S
CHAIN SPECS	.25 INCH PITCH .043 INCH GAUGE 56 DRIVE LINKS
CHAIN ADJUSTMENT	MANUAL
LIMB HOOK	METAL
EXTENSION METHOD	TELESCOPING
TOOL REACH EXTENDED with two extension poles (1 included, 1 sold separately)	UP TO 17 FEET
OILING	AUTOMATIC
BATTERY TECHNOLOGY	56V ARC LITHIUM™
HOUSING	UV-RESISTANT COMPOSITE
TOOL LENGTH	9.6 FEET
WEIGHT WITHOUT BATTERY	9.3 LBS
WEATHER RESISTANT RATING	IPX5

5X LONGER LIFE



EDX2000
COMMERCIAL 8" STRAIGHT SHAFT EDGER

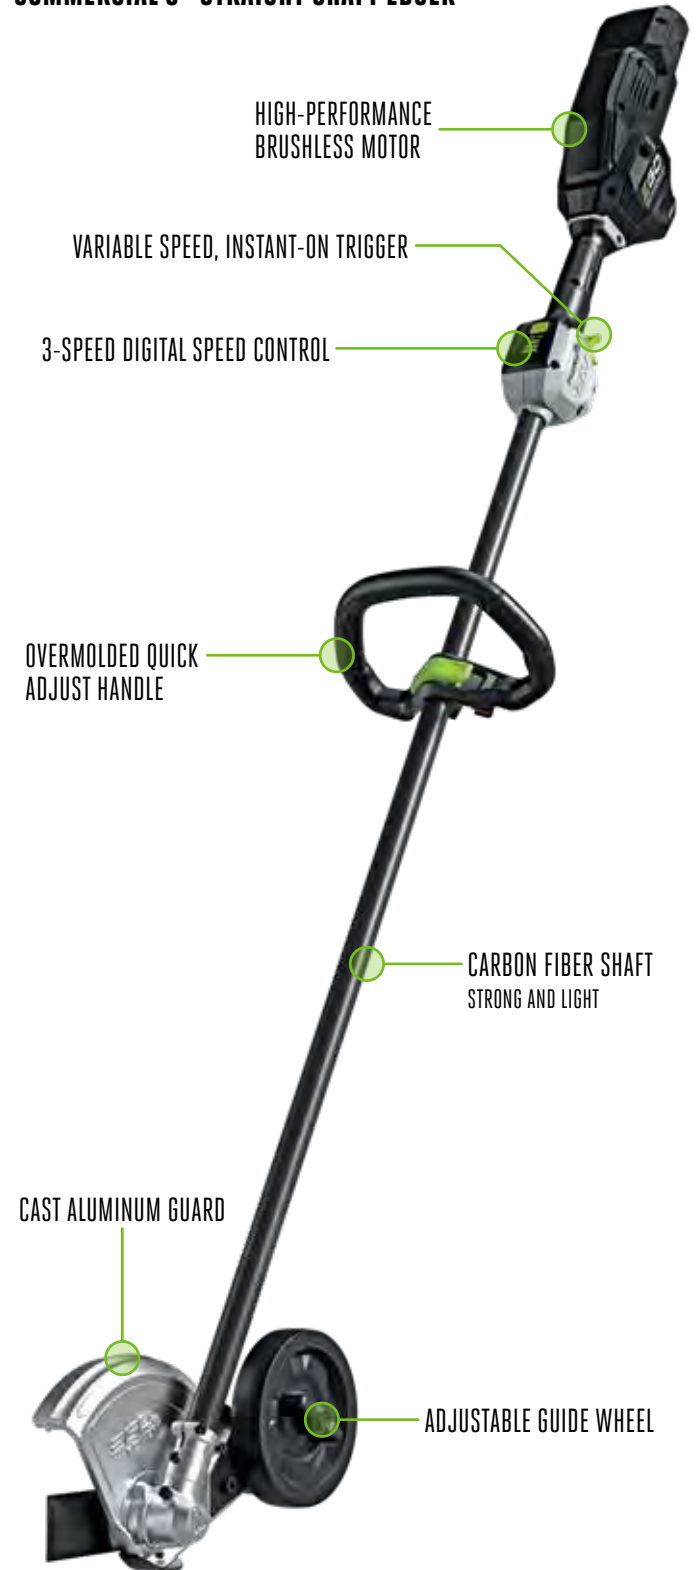

HIGH-PERFORMANCE
BRUSHLESS MOTOR

VARIABLE SPEED, INSTANT-ON TRIGGER

3-SPEED DIGITAL SPEED CONTROL

OVERMOLDED QUICK
ADJUST HANDLE


CARBON FIBER SHAFT
STRONG AND LIGHT

CAST ALUMINUM GUARD

ADJUSTABLE GUIDE WHEEL

EDX2000-C

COMMERCIAL 8" CURVED SHAFT EDGER

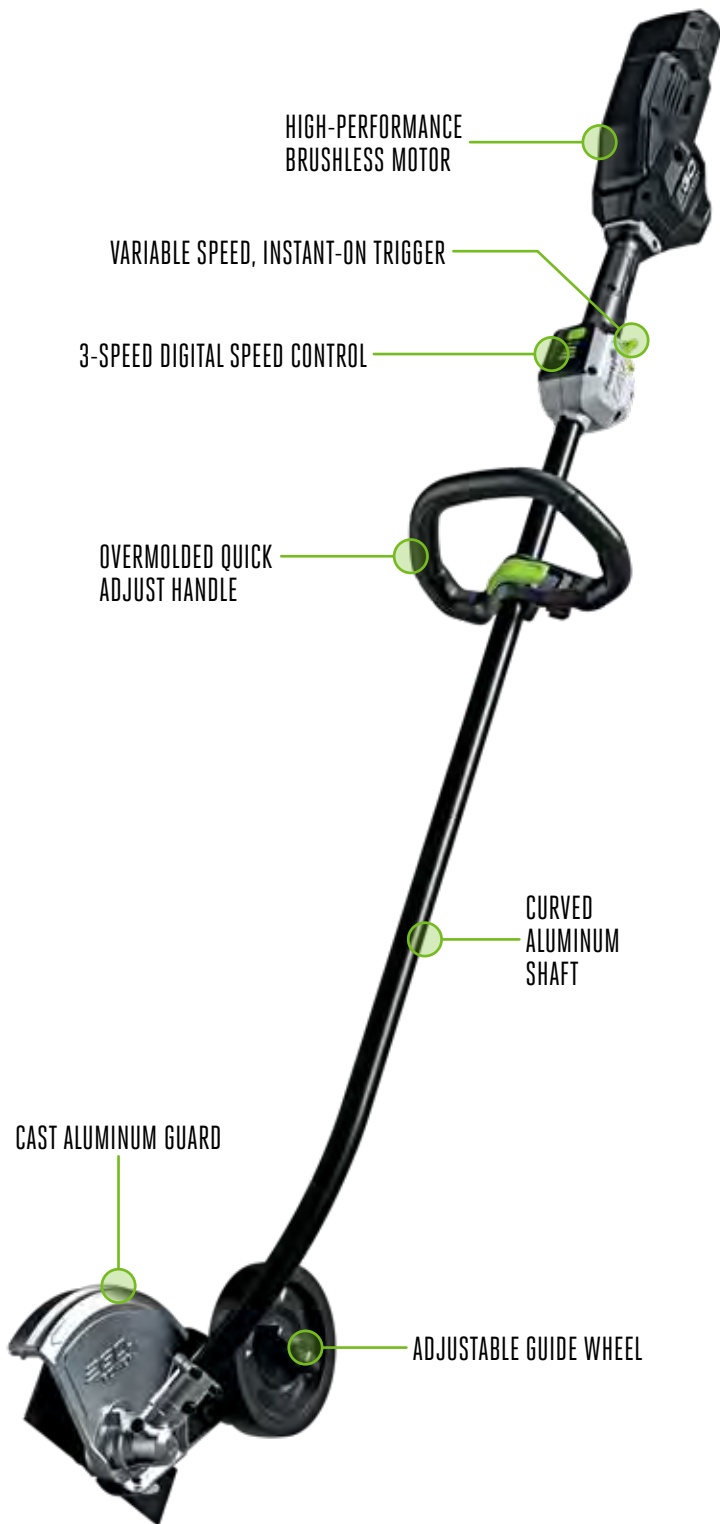

HIGH-PERFORMANCE
BRUSHLESS MOTOR

VARIABLE SPEED, INSTANT-ON TRIGGER

3-SPEED DIGITAL SPEED CONTROL

OVERMOLDED QUICK
ADJUST HANDLE

CURVED
ALUMINUM
SHAFT

CAST ALUMINUM GUARD

ADJUSTABLE GUIDE WHEEL



	EDX2000	EDX2000-C
GAS EQUIVALENT	25CC RATING	
MAX POWER	1600W	2300W
RATED POWER	1200W	1600W
RUN TIME with 5.0Ah battery on low	UP TO 60 MINUTES	
BLADE SIZE	8 INCHES	
MAX CUTTING DEPTH	3 INCHES	
ARBOR SIZE	1 INCH	
SPEEDS no load RPM	3000 / 4000 / 4500 RPM	4000 / 5500 / 7000 RPM
SHAFT MATERIAL	CARBON FIBER	ALUMINUM
SHAFT STYLE	STRAIGHT	CURVED
DRIVE SHAFT	SOLID STEEL	FLEXIBLE
BATTERY TECHNOLOGY	56V ARC LITHIUM™	
HOUSING	UV-RESISTANT COMPOSITE	
TOOL LENGTH	69.5 INCHES	67.3 INCHES
WEIGHT WITHOUT BATTERY	10.4 LBS	10.4 LBS
WEATHER RESISTANT RATING	IPX5	

INDUSTRY-LEADING DURABLE CARBON FIBER RAILS



HTX5300-PA

**COMMERCIAL 21" ARTICULATING POLE
HEDGE TRIMMER**





HTX5310-P
COMMERCIAL 21" EXTENDED POLE
HEDGE TRIMMER

HIGH-PERFORMANCE
BRUSHLESS MOTOR

3-SPEED DIGITAL SPEED CONTROL

SHOULDER STRAP HOOK
(SHOULDER STRAP INCLUDED)



VARIABLE SPEED,
INSTANT-ON
TRIGGER

CARBON FIBER SHAFT
STRONG AND LIGHT


SERVICEABLE
GEARBOX & BLADES
EASY SHARPENING

TRIPLE-SIDED
LASER CUT BLADES

CARBON FIBER RAIL
STRONG AND LIGHT


HTX5300-P

COMMERCIAL 21" SHORT POLE HEDGE TRIMMER

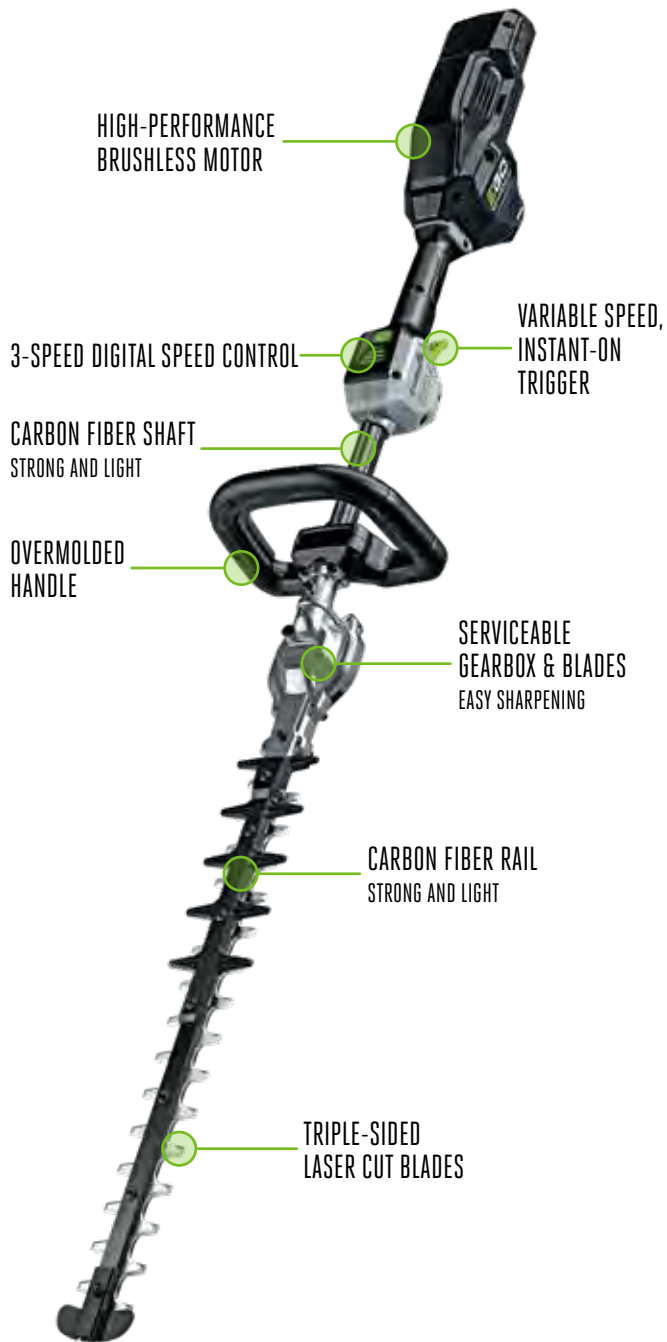

	HTX5300-PA	HTX5310-P	HTX5300-P
GAS EQUIVALENT	25CC RATING		
MAX POWER	1000W		
RATED POWER	650W		
RUN TIME with 2.5Ah battery on low	UP TO 75 MINUTES		
BLADE	21-INCH DUAL-ACTION HARDENED STEEL		
CUTTING CAPACITY	1.1 INCHES		
CUTTING POSITIONS	45°, 30°, 15°, 0°, -15°, -30°, -45°, -60°, -75°, -90°, -180°	0°	
HEAD ROTATION	180° ARTICULATING MAX RANGE	FIXED	
SPEEDS	3200 / 3600 / 4000 RPM		
SHAFT MATERIAL	CARBON FIBER		
GEARBOX	DIE CAST ALUMINUM / SERVICEABLE		
BATTERY TECHNOLOGY	56V ARC LITHIUM™		
HOUSING	UV-RESISTANT COMPOSITE		
SHAFT LENGTH	59 INCHES	42 INCHES	20 INCHES
OVERALL TOOL LENGTH	98.2 INCHES	82.7 INCHES	59.1 INCHES
WEIGHT WITHOUT BATTERY	11 LBS	9.0 LBS	9.2 LBS
WEATHER RESISTANT RATING	IPX5		

ADVANCED TORQUE AND CHAIN SPEED

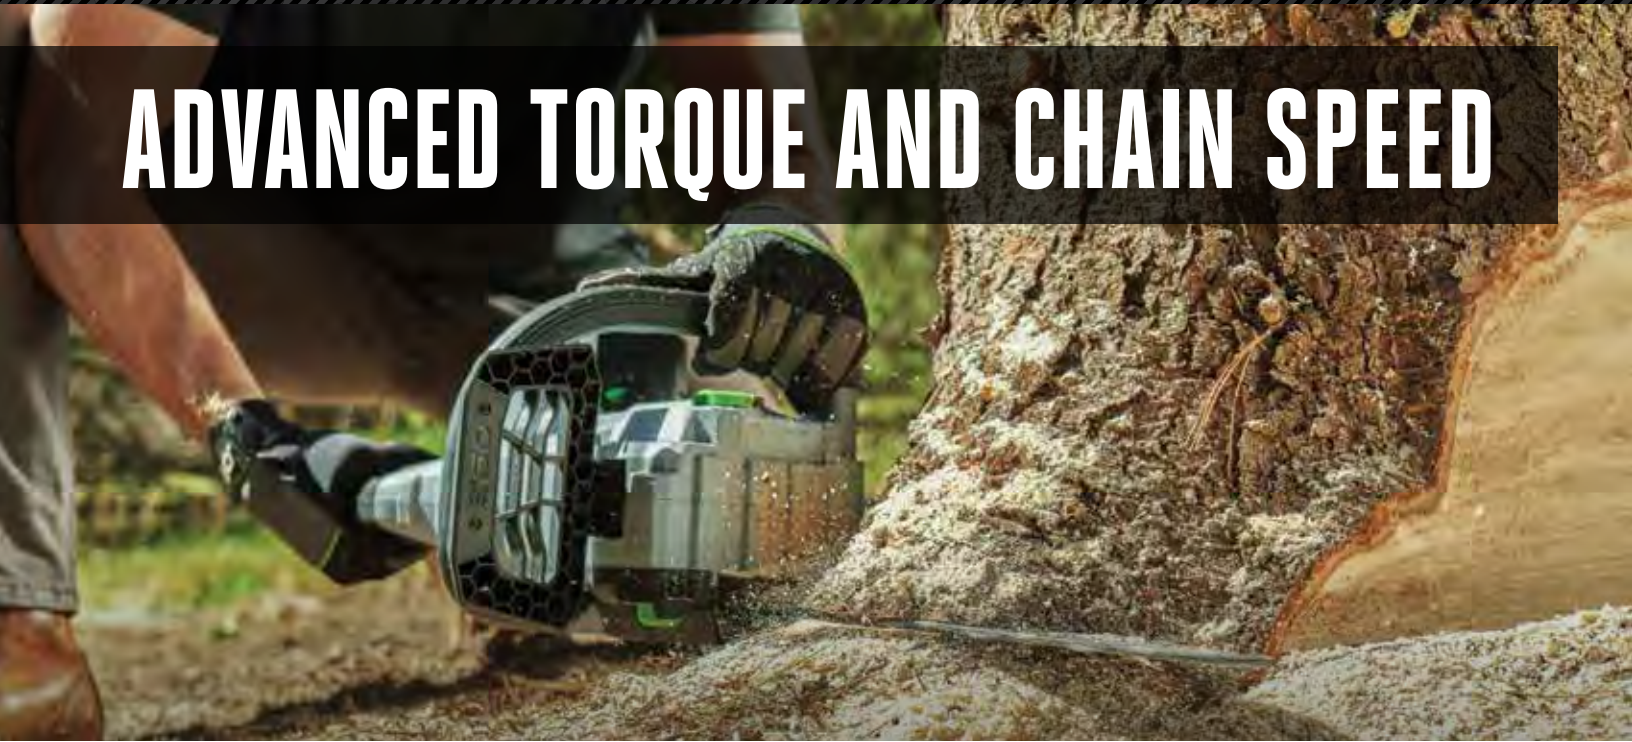

CSX5000

COMMERCIAL 20" FARM AND RANCH CHAIN SAW

- BACKLIT DISPLAY
- SAFETY BRAKE ON/OFF
- LED WORK LIGHT
- BLUETOOTH
- 3-MODE SPEED SELECT
- BATTERY FUEL GAUGE
- OVERLOAD INDICATOR
- LOW OIL INDICATOR
- OIL FLOW CONTROL



Additional SKU Configurations:
CSX5007 Includes 8.0Ah battery and 550W charger.

CSX3000

COMMERCIAL 12" SERIES TOP-HANDLE CHAIN SAW



Additional SKU Configurations:
CSX3003 Includes 5.0Ah battery and 550W charger.



	CSX5000	CSX3000
GAS EQUIVALENT	60CC RATING	35.2CC RATING
MAX CUTTING CAPACITY (4 x 4 wood)	UP TO 275 CUTS WITH 8.0AH BATTERY	UP TO 265 CUTS WITH 5.0AH BATTERY
MAX POWER	3500W	2500W
RATED POWER	2700W	1800W
BAR LENGTH	20 INCHES	12 INCHES
CHAIN SPEED	30 M/S	20 M/S
CHAIN SPECS	.325 INCH PITCH .050 INCH GAUGE 78 DRIVE LINKS	.375 INCH PITCH .043 INCH GAUGE 45 DRIVE LINKS
CHAIN ADJUSTMENT	MANUAL	
OILING	AUTOMATIC	
CHAIN KICK BACK BRAKE	YES	
AUTO SAFETY BRAKE	YES	NO
BUCKING SPIKES	METAL	
DIGITAL USER INTERFACE	YES	NO
LED WORK LIGHT	YES	NO
BATTERY TECHNOLOGY	56V ARC LITHIUM™	
HOUSING	UV-RESISTANT COMPOSITE	
WEIGHT WITHOUT BATTERY	13 LBS	7.7 LBS
WEATHER RESISTANT RATING	IPX5	

THE MOST ADVANCED TECHNOLOGY IN THE INDUSTRY


BETTER PERFORMANCE IS BUILT IN

No matter which EGO battery you choose, you'll get:

- Protection from drops and the elements, thanks to our shock-resistant design
- Patented ARC Lithium design keeps the battery from overheating
- Patented power management system to maximize power and runtime
- An integrated fuel gauge that shows you how much power is left
- 2 years with registration completed within 90 days from date of purchase.
1 year warranty without registration



ARC56VTM
LITHIUM

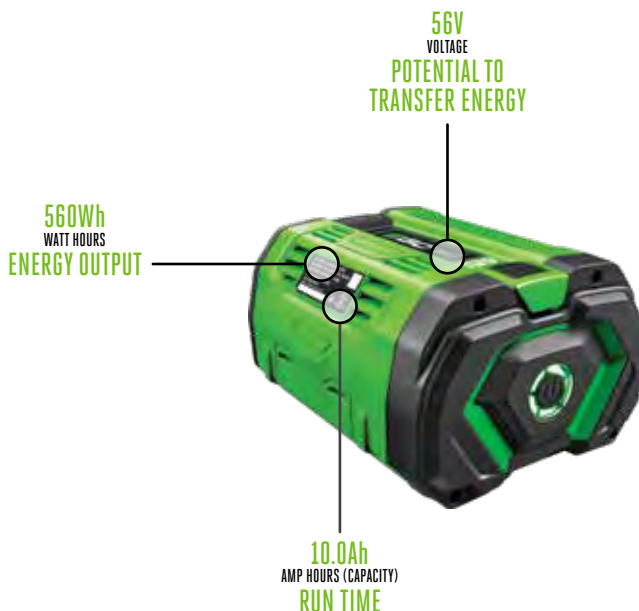

ALL VOLTS ARE NOT CREATED EQUAL

VOLTAGE \neq PERFORMANCE

Performance of a battery is determined by a combination of **ENERGY(Wh)** and **POWER(W)**

$$\text{CAPACITY (Ah)} \times \text{VOLTAGE (V)} = \text{ENERGY (Wh)}$$

$$\text{VOLTAGE (V)} \times \text{CURRENT (A)} = \text{POWER (W)}$$

BA1400T
2.5Ah BATTERY
140Wh



BA4200T
7.5Ah BATTERY
420Wh



BA2242T
4.0Ah BATTERY
224Wh



BA4480T
8.0Ah BATTERY
448Wh



BA2800T
5.0Ah BATTERY
280Wh



BA5600T
10.0Ah BATTERY
560Wh



BA2800T-2
5.0Ah BATTERY 2-PACK
560Wh TOTAL



BA6720T
12.0Ah BATTERY
672Wh



BA3360T
6.0Ah BATTERY
336Wh



BA6720T-2
12.0Ah BATTERY 2-PACK
1,344Wh TOTAL



COMMERCIAL CHAIN SAWS

AC1200

12" replacement saw chain for CSX3000
3/8"/9.5mm LP Pitch,
.043"/1.1mm Gauge Saw Chain, 45 Drive Links



AG1200

12" replacement guide bar for CSX3000



ABH3000

Battery holster for CSX3000



AC1635

16"/40cm, .325" Pitch,
.050"/1.3 mm Gauge Saw Chain,
66 Drive Links



AC1835

18"/45cm, .325" Pitch,
.050"/1.3 mm Gauge Saw Chain,
72 Drive Links



AC2035

20"/50cm, .325" Pitch,
.050"/1.3 mm Gauge Saw Chain,
78 Drive Links



AK1635

16"/40cm, .325" Pitch,
.050"/1.3 mm Gauge Chain and Bar Kit,
66 Drive Links



AK1835

18"/45cm, .325" Pitch,
.050"/1.3 mm Gauge Chain and Bar Kit,
72 Drive Links



AK2035

20"/50cm, .325" Pitch,
.050"/1.3 mm Gauge Chain and Bar Kit,
78 Drive Links



COMMERCIAL PGX™

ACE0700

PGX™ 2 Foot Power Cable




ACE1500

PGX™ 5 Foot Power Cable



AEK1000


PGX™ Commercial Charging E-Track Mounting Kit



COMMERCIAL HEDGE TRIMMERS


AHB5300P

Commercial 21" Hedge Trimmer Replacement
Blade Set
Compatible with HTX5300-P and HTX5310-P



AHB5300PA

Commercial 21" Articulating Hedge Trimmer
Replacement Blade Set
Compatible with HTX5300-PA



COMMERCIAL BRUSH CUTTERS

AP45000

Premium Commercial Double Shoulder Brush
Cutter Harness



COMMERCIAL WALK-BEHIND MOWERS

AB5301

22" High-Lift Commercial Blade



COMMERCIAL STRING TRIMMER

AD4510

Commercial Replacement String Trimmer Guard



AL2403

0.095" x 800' / 3 lbs. Commercial Trimmer Line



AL2405

0.095" x 1400' / 5 lbs. Commercial Trimmer Line



AL2703

0.105" x 690' / 3 lbs. Commercial Trimmer Line



AL2420PB

Bi-component trimmer line (pre-cut line)



AL2470B

Bi-component trimmer line (bulk package)



AOL3200

32oz oil-free, biodegradable bar and chain lubricant. Water soluble for easy clean-up.



AOL1000

1 Gallon oil-free, biodegradable bar and chain lubricant. Water soluble for easy clean-up



AH3800

Manual Load, Bump Head for STX3800, STX4500, BCX3800, and BCX4500



AH3810

Commercial rapid reload trimmer head



SAFETY

GS003

Safety Glasses - Yellow Lens



GS002

Safety Glasses - Grey Lens



GS001

Safety Glasses - Clear Lens



GV001M

Synthetic Glove - Medium
(Note: gloves run small)



GV001L

Synthetic Glove - Large
(Note: gloves run small)



GV001XL

Synthetic Glove - X-Large
(Note: gloves run small)



GV001XXL

Synthetic Glove - XX-Large
(Note: gloves run small)





Your local dealer:

egopowerplus.com/commercial



All rights reserved. Neither this catalog nor its text, images, illustrations or part thereof, may be reproduced, stored in a retrieval system, photocopied, recorded or transmitted in any form, whether electronic or otherwise, without our consent. To the best of our knowledge, all descriptions, images and illustrations contained in this catalog are correct at the time of going to print.

We cannot, however, be held liable for any inaccuracies of description, image or illustration and reserve the right to change specifications without notification.

©EGO 2024

EGOCOMCTL-24